


Inflatable Tank

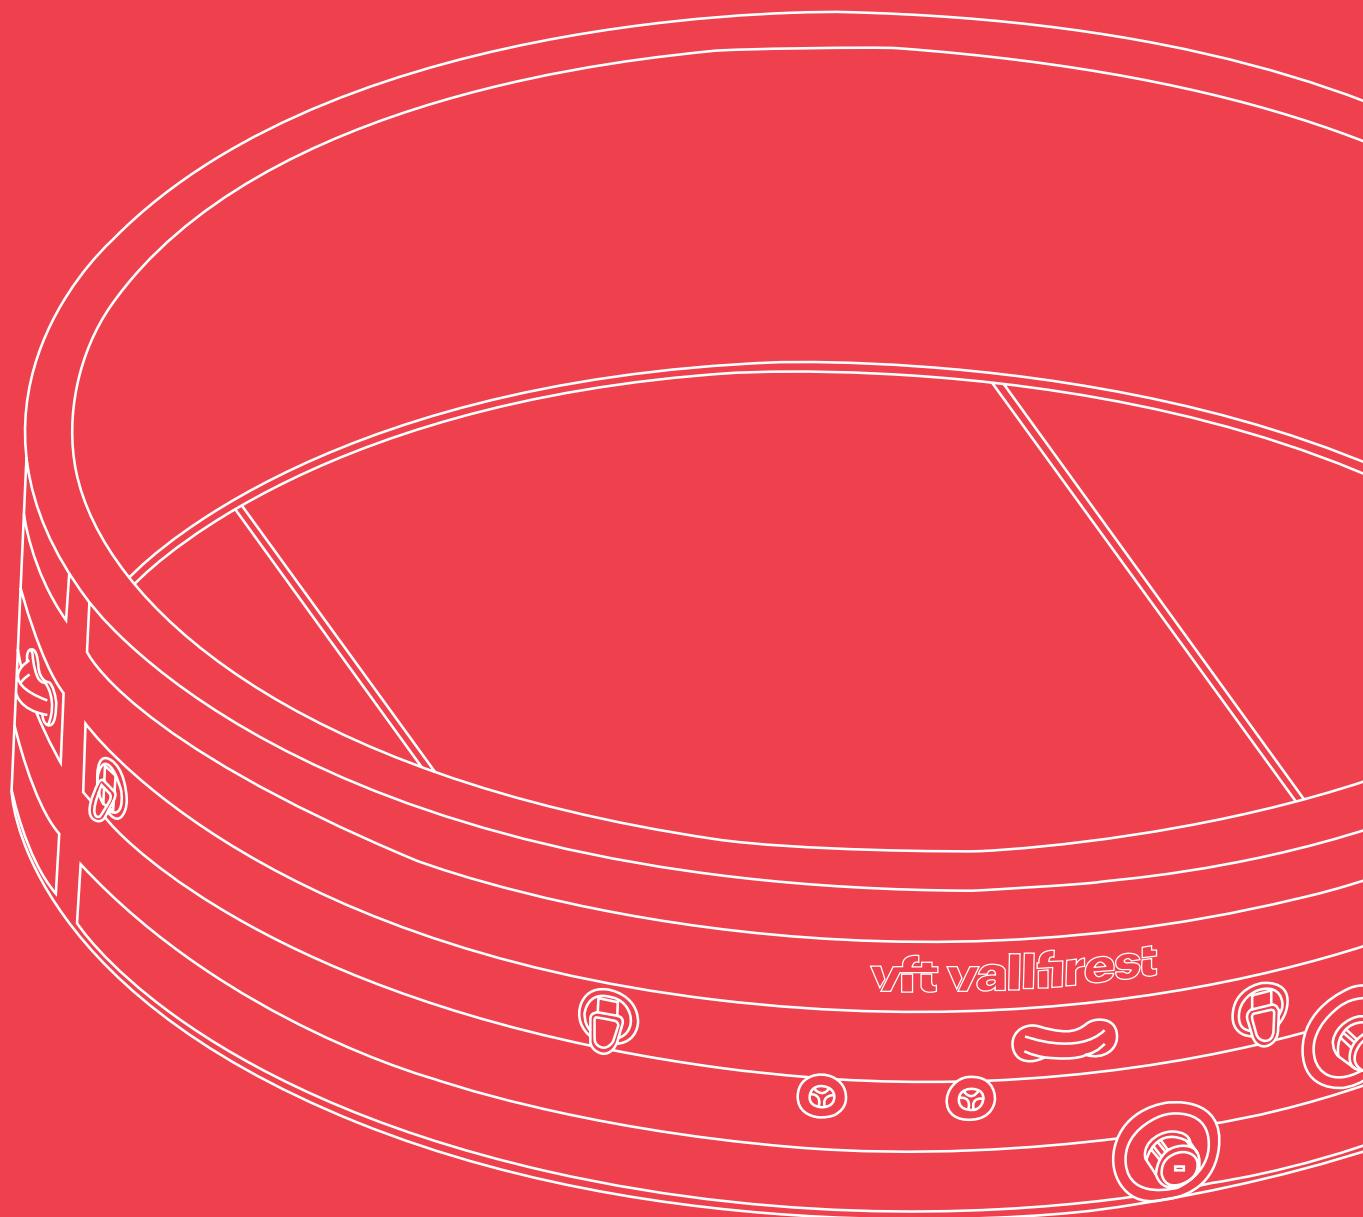

Inflatable Tanks

High-capacity tanks, quick and easy to assemble / up to 56,000 L (14.800 gal)

Vallfirest inflatable tanks are a commitment to improving logistics in the creation of remote water points. They exponentially reduce the time and complexity of assembly compared to traditional metal frame tanks and offer more efficient features than floating collar tanks.




1. Configurations

Technical specifications								
	3.000 L	7.000 L	12.000 L	25.000 L	56.000 L			
Reference	DED5705-20003	DED5705-30007	DED5705-30012	DED5705-30025	DED5705-30056			
Diameter	2 m 6.5 ft	3 m 9.8 ft	4 m 13 ft	4 m 13 ft	6 m 20 ft			
Height	1 m 3.3 ft	1 m 3.3 ft	1 m 3.3 ft	2 m 6.5 ft	2 m 6.5 ft			
Thickness	10 cm 4 in	10 cm 4 in	10 cm 4 in	10 cm 4 in	10 cm 4 in			
Usable Height	85 cm 33.5 in	85 cm 33.5 in	85 cm 33.5 in	1,7 m 67 in	1,7 m 67 in			
Capacity	3.000 L 790 gal	7.000 L 1.850 gal	12.000 L 3.170 gal	25.000 L 6.600 gal	56.000 L 14.800 gal			
Weight	31 kg 68 lbs	43 Kg 95 lbs	78 Kg 171 lbs	105,5 Kg 232 lbs	173,5 Kg 382 lbs			
Folded dimensions	90 x 35 x 35 cm 35 x 14 x 14 in	90 x 45 x 45 cm 35 x 18 x 18 in	120 x 63 x 63 cm 47 x 25 x 25 in	160 x 70 x 70 cm 63 x 27 x 27 in	170 x 113 x 90 cm 67 x 44 x 35 in			
Inflation time	1 min	1 min.	2 min.	3 min.	4 min.			
Connections	Two 2" threaded connections		Two 3" threaded connections					
Material	PVC 2.600 g / m2							
Color	Orange							
Bottom	Double layer, blue layer							


2. Tank configuration

2.1 3.000, 7.000 and 12.000 L (790, 1.850 and 3.170 gal) Tanks

Tank exterior

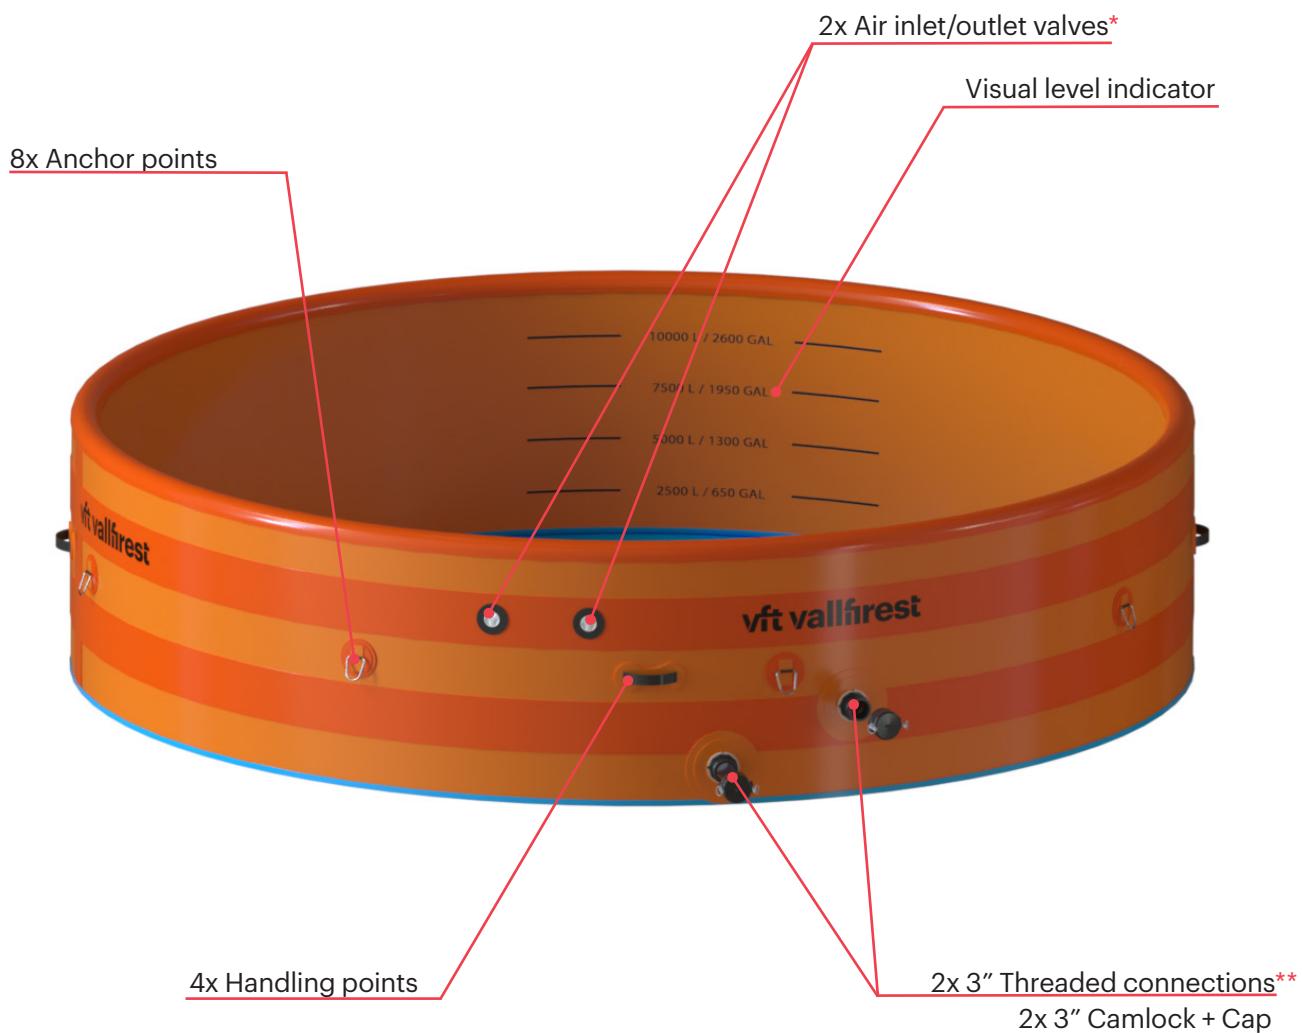

Tank interior

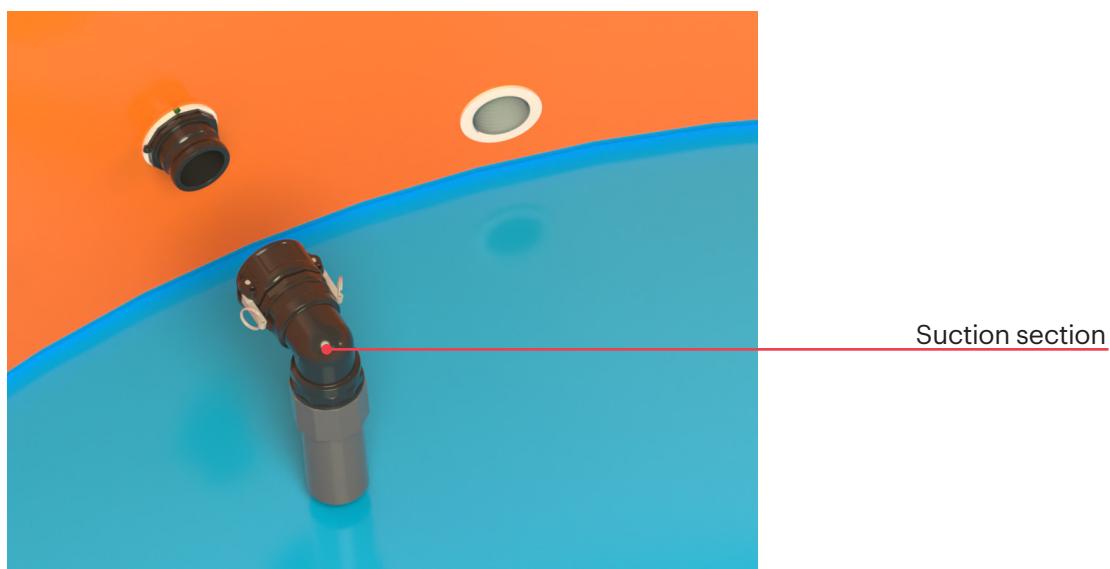


* 1 Air valve in 3.000 L (790 gal) tanks.


** 2" in 3.000 L (790 gal) tanks.

2.2 25.000 and 56.000 L (3.170 and 6.600 gal) Tanks

Tank exterior

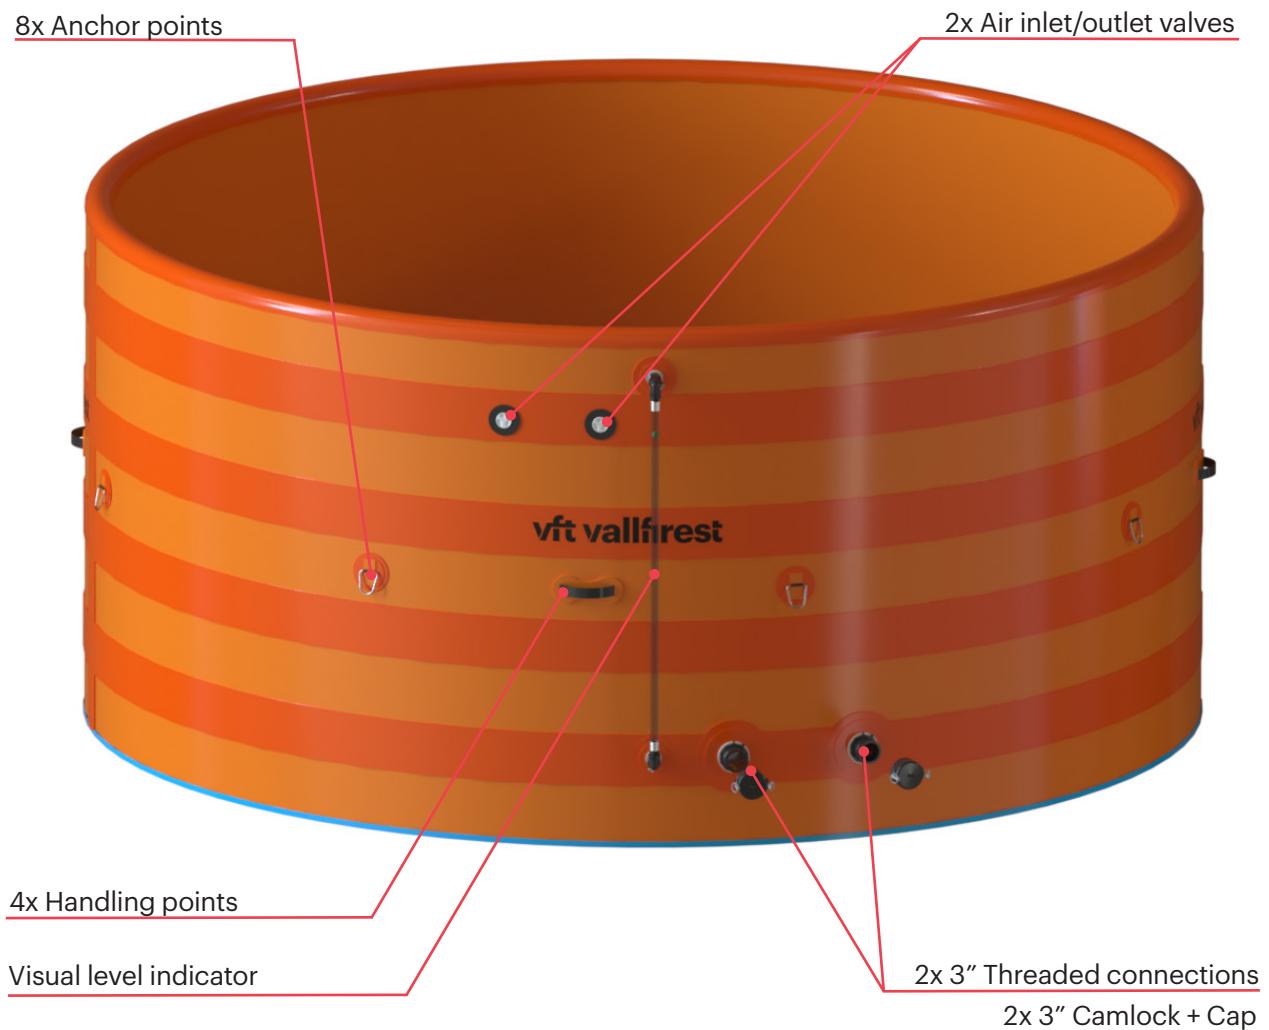

Tank interior

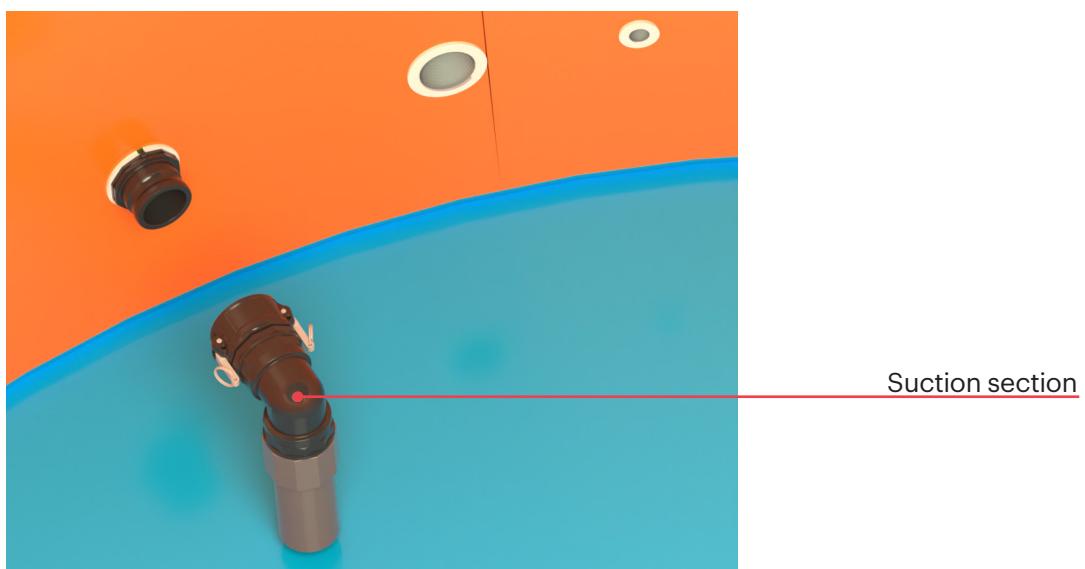

3. Included components

3.1 Repair kit

Two complete kits for tank repair and maintenance are included.

PARTS INCLUDED IN EACH KIT:

- 1x Teflon tape
- 2x Nautical adhesive for PVC
- 2x Orange PVC patches
- 1x Air valve cap
- 1x Valve tool



3.2 Anchoring kit

Kit to anchor the tank to the ground.

PARTS INCLUDED IN THE KIT:

- 8x Straps
- 16x Stakes
- 16x Carabiners
- 1x Hammer



3.3 Blowers

Two air blowers are included to inflate and deflate the tank through the inflation valves.

TECHNICAL SPECIFICATIONS OF THE EUROPEAN VERSION:

- Power: 1200 W
- Electrical plug TYPE C
- Voltage AC 220-240 V



TECHNICAL SPECIFICATIONS OF THE AMERICAN VERSION:

- Power: 1200 W
- Electrical plug TYPE A
- Voltage AC 110-120 V

3.4 Portable DeWalt blower with battery

DeWalt DCC018N blower, compact and portable, for inflating the tank with a cordless power source. Each blower includes one 18 V DeWalt XR battery.



TECHNICAL DATA:

- Maximum pressure: 11 bar | 160 psi
- Power: 150 W
- Voltage: 18 V
- Weight: 2,3 Kg | 5 lbs
- Includes adapter and extension line.
- Two units included for 25.000 and 56.000L tanks (6.600 and 14.800gal).

3.5 DeWalt Battery Charger

Fast charger for 18V DeWalt batteries, compatible with the portable blower.



TECHNICAL DATA:

- Charging time: 64 minutes.
- One unit per tank.
- Electrical plug TYPE C
- Voltage AC 220-240 V

3.6 Square base

Double-layer PVC square base to protect the tank from hostile elements on the ground.

**TECHNICAL DATA:**

- Dimensions for 3,000 L (790 gal) tanks: 3 x 3 m
- Dimensions for 7,000 L (1.850 gal) tanks: 4 x 4 m
- Dimensions for 12,000 and 25,000 L (3.170 and 6.600 gal) tanks: 5 x 5 m
- Dimensions for 56,000 L (14.800 gal) tanks: 7 x 7 m

3.7 Carrying bag

PVC carrying bag equipped with a strap system to facilitate handling and transport.

**TECHNICAL DATA:**

- Zipper closure.
- Handle system for easy carrying.
- Includes a small bag for transporting accessories.

3.8 Pressure Gauge

Gauge for measuring tank pressure. Measurement ranges from 0 to 2 bar and 0 to 30 Psi.

**TECHNICAL DATA:**

- Easy to read analogic display.
- Compatible connection with tank air valves.

3.9 Camlock cover bag

Camlock cover bag designed to protect the tank from abrasion and accidental damage.

**TECHNICAL DATA:**

- Durable material.
- Elastic band to ensure a secure attachment to the Camlock.
- 3 units included.

4. Optional accessories

4.1 Reducers and adapters for the tank

Camlock reducers

- Camlock reducer F 3" x M 2"

DVD5705-20002



- Camlock reducer F 3" x M 1-1/2"

DVD5705-20003

- Camlock reducer F 2" x M 1-1/2"

DVD5705-20005

Storz reducers

- Storz Reducer - 75-B x 52-C

DED5910-00003



Camlock- Storz adapters

- Adapter Camlock F 3" - Storz 75-B

DVD5705-20001



- Adapter Camlock H 2" - Storz 52-C

DVD5705-20004

4.2 Valves

· M 3" Camlock valve

DVD5705-10001

TECHNICAL DATA:

- Maximum working pressure: 9 bar | 130 psi
- Weight: 4,7 Kg | 10,3 lbs



· M 2" Camlock valve

DVD5705-10003

TECHNICAL DATA:

- Maximum working pressure: 9 bar | 130 psi
- weight: 1,5 Kg | 3,3 lbs

· Storz 75-B valve

DVD5705-10002

TECHNICAL DATA:

- Maximum working pressure: 9 bar | 130 psi
- Weight: 5 Kg | 11 lbs



· Storz 52-C valve

DVD5705-10004

TECHNICAL DATA:

- Maximum working pressure: 9 bar | 130 psi
- Weight: 1,6 Kg | 3,5 lbs

4.3 Tank-to-pump connection hoses

- **DN50 hose Camlock F2"**

DVD5705-30001

Yellow spiral hose made of flexible PVC with a rigid transparent PVC spiral. Includes two 2" female Camlocks for pumps with 2" suction.

TECHNICAL DATA:

- Length: 5m
- Hose diameter: DN50 (2")
- Weight: 5,5 Kg | 12,1 lbs



- **DN40 hose Camlock F 1-1/2"**

DVD5705-30002

Yellow spiral hose made of flexible PVC with a rigid transparent PVC spiral. Includes two 1 1/2" female Camlocks for pumps with 1 1/2" suction.

TECHNICAL DATA:

- Length: 5m
- Hose diameter: DN40 (1 1/2")
- Weight: 4 Kg | 8,8 lbs



4.4 Adaptadores para la bomba

- **Pump adapter Camlock M 2" - NPSH 2"**

DVD5705-40001

- **Pump adapter Camlock M 1-1/2" - NPSH 1-1/2"**

DVD5705-40003

- **Pump adapter Camlock M 2" - Storz 52-C**

DVD5705-40002

- **Pump adapter Camlock M 1-1/2" - Storz 52-C**


DVD5705-40004



DISCLAIMER

- Images are for illustrative purposes only and may differ from the supplied product.

5 Accessory compatibility

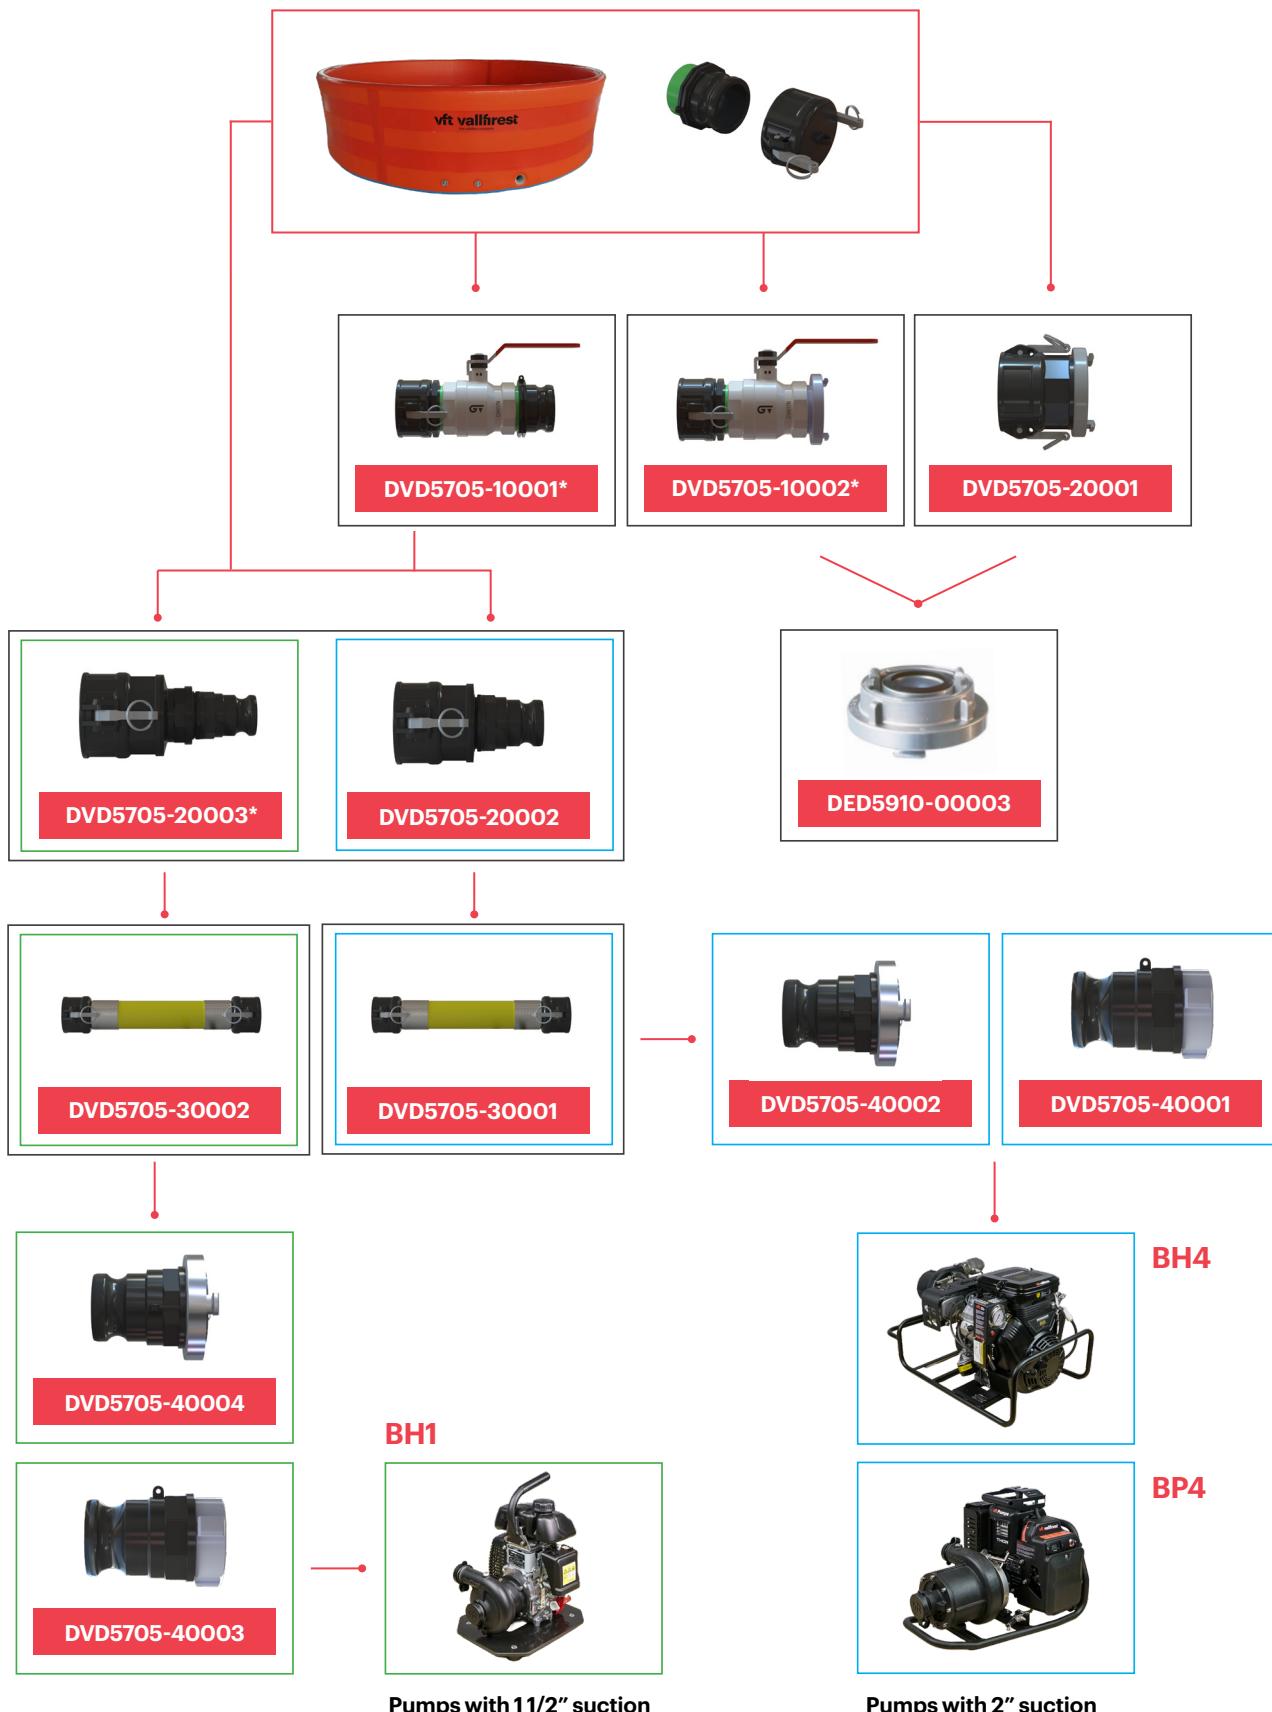

* Available in 2" for 3000 L tanks

Pumps with 11/2" suction

Pumps with 2" suction

Generic accessories

Do you have any questions?

Contact us: clientes@vallfirest.com
T. +34 938 678 779