



HYDRAULIC LIFTING TOOL B 10 ALU - 1107314

-  **LIGHTWEIGHT**
-  **SPEED CONTROL**
-  **INTUITIVE**
-  **SYSTEM**



- The modern advancement of the Hydraulic Lifting Tool B 10
- Significant weight reduction thanks to optimised aluminium body
- More lifting power to lift even modern vehicles (especially trams)
- Drive via separate cordless screwdriver for precise and energy-saving work
- Ergonomic weight distribution and large, balanced carrying handle
- Flexible height adjustment of the lifting claw thanks to 14 locking positions
- Lifting is also possible at the pressure piece of the head
- Tool-free replaceable foot (flat and convex with bearing plate)
- Sensitive and controlled lowering thanks to improved drain valve
- Intuitive operation with red, clearly recognisable controls
- Replaceable steel support plate on the claw

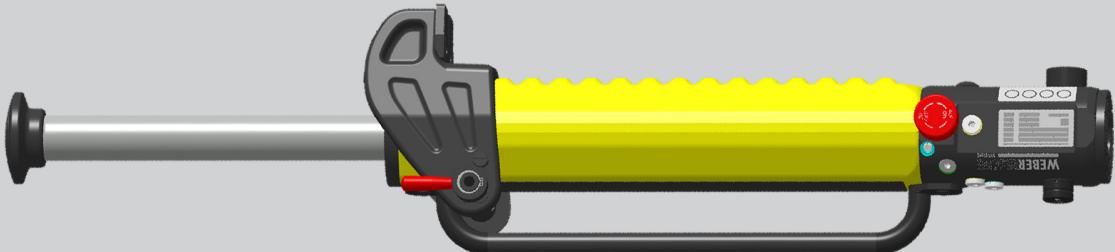

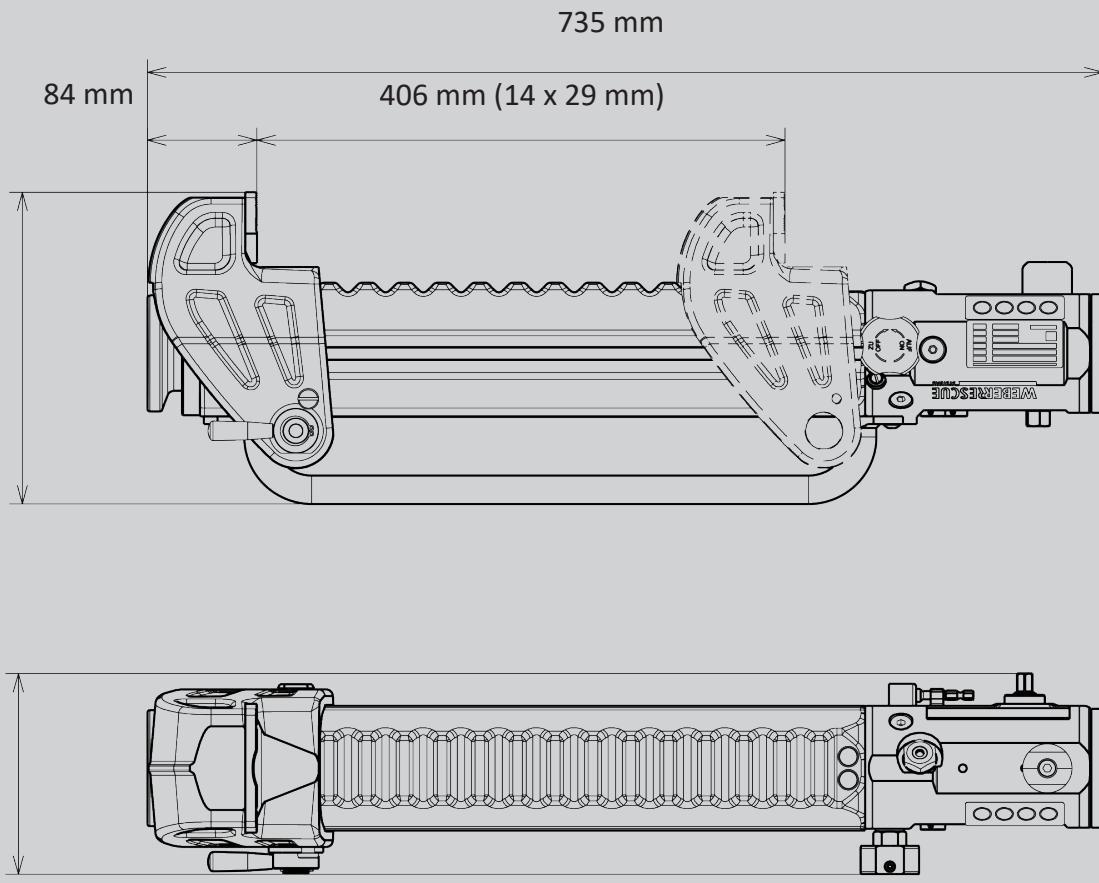

Technical data:

Dimensions	735 x 156 x 242 mm
Weight	22.9 kg
Lifting height	350 mm
Lifting capacity	105 kN
Installation height (claw)	84 - 490 mm (14 rest positions à 29 mm)
Installation height (head)	735 mm
Socket for cordless screwdriver	hexagonal 12 mm (SW12)
Torque cordless screwdriver	min. 50 Nm (z.B. Milwaukee M18 FPD3)
Extension time	approx. 45 seconds (at 2100 rpm)
Scope of delivery	BUFFALO B 10 ALU, flat foot, screwdriver bit 12 mm to 1/4" HEX
Part no.	1107314

Optional accessories:

Spherical base	4833791
Base bearing plate	1106472



WEBER-HYDRAULIK GMBH
 Heilbronner Straße 30
 74363 Güglingen, Germany
 Phone +49 7135 71-10270
 info@weber-rescue.com

Emil Weber Platz 1
 4460 Losenstein, Austria
 Phone +43 7255 6237-120
 info@weber-rescue.com